




			MANITOU	MANITOU
			EP16	EP18
			·	-
	Q	kg	1600	1800
	С	mm	600	600
	х	mm	964/901	953/890
	у	mm	1309/1246	1372/1312
		kg	445	480
		kg	825/1185	1002/1278
		kg	311/134	336/144
		mm	1x(Ø230x75)	1x(Ø230x75)
		mm	4x(Ø82x100)	2x(Ø82x100)
		mm	2x(Ø100x40)	2x(Ø100x40)
			1x + 2/4	1x + 2/2
bi	10	mm	435	435
bi	11	mm	365	365
h	h3	mm	125	125
h1	114	mm	1320	1336
h1	13	mm	85 +5 -0	85 +5 -0
	l1	mm	1659	1739
L C	12	mm	480	589
b	b1	mm	680	680
s/0	e / I	mm	47x160x1150	45x175x1150
b	b5	mm	526*	540*
m	m2	mm	38	35
A:	Ast	mm	1921	1939
W W	Wa	mm	1475/1422	1544/1484
		km/h	5,8/6	5,8/6
		m/s	0,030/0,038	0,030/0,038
		m/s	0,050/0,045	0,049/0,045
		%	10/25	10/25
		kW	1,2	1,2
		kW	1	1
			BS	-
		V/Ah	24/170	24/180**
		kg	170	180
		db (A)	65	65




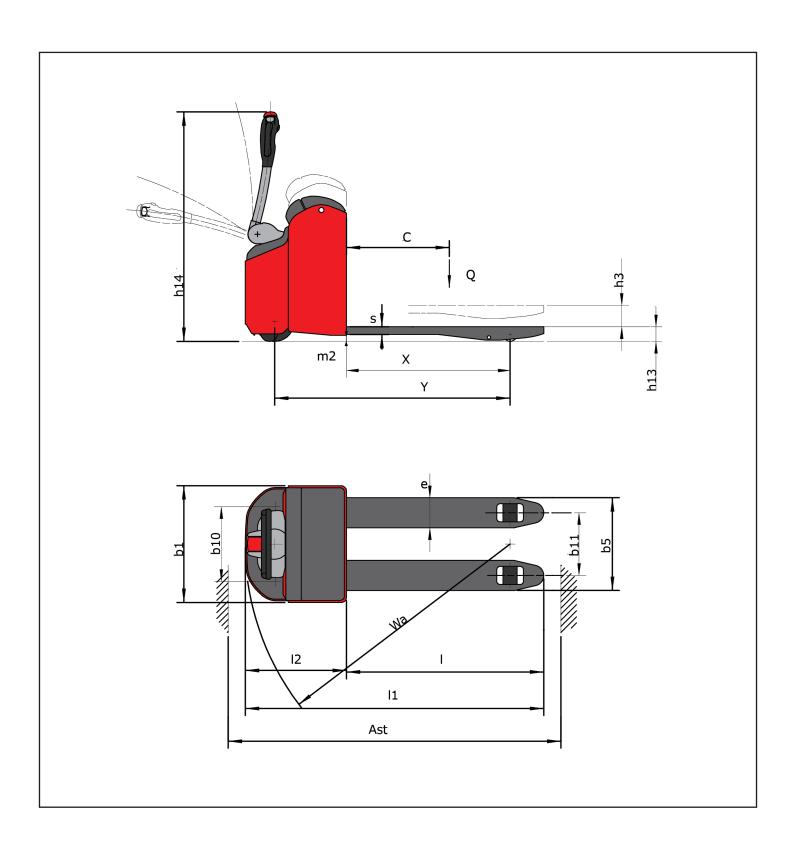

Ĺ				MANITOU	MANITOU
				EP20	EP22
		Q	kg	2000	2200
		С	mm	600	600
		х	mm	953/890	953/890
		у	mm	1372/1312	1452/1392
			kg	482	560
			kg	1077/1405	1286/1474
Ī			kg	337/145	392/168
ı			mm	1x(Ø230x75)	1x(Ø230x75)
ŀ			mm	4x(Ø82x100)	4x(Ø82x100)
ı			mm	2x(Ø100x40)	2x(Ø100x40)
ŀ				1x + 2/4	1x + 2/4
ŀ		b10	mm	435	435
ŀ		b11	mm	365	365
		h3	mm	125	125
ı		h14	mm	1336	1336
		h13	mm	85 ^{+5 -0}	85 +5 -0
		l1	mm	1739	1819
		12	mm	589	589
		b1	mm	680	680
ı		s / e / l	mm	45x175x1150	45x175x1150
ı		b5	mm	540*	540*
ı		m2	mm	35	35
ı		Ast	mm	1939	2019
ı		Wa	mm	1544/1484	1624/1564
\neg			km/h	5,8/6	5,8/6
ı			m/s	0,029/0,038	0,028/0,038
Ì			m/s	0,049/0,028	0,052/0,045
ı			%	10/25	10/25
Ì				·	·
ı					
			kW	1,2	1,7
ı			kW	1	2
İ				-	-
ı			V/Ah	24/180**	24/270**
İ			kg	180	245
\exists					
ŀ					
- 1			db (A)	65	65

*



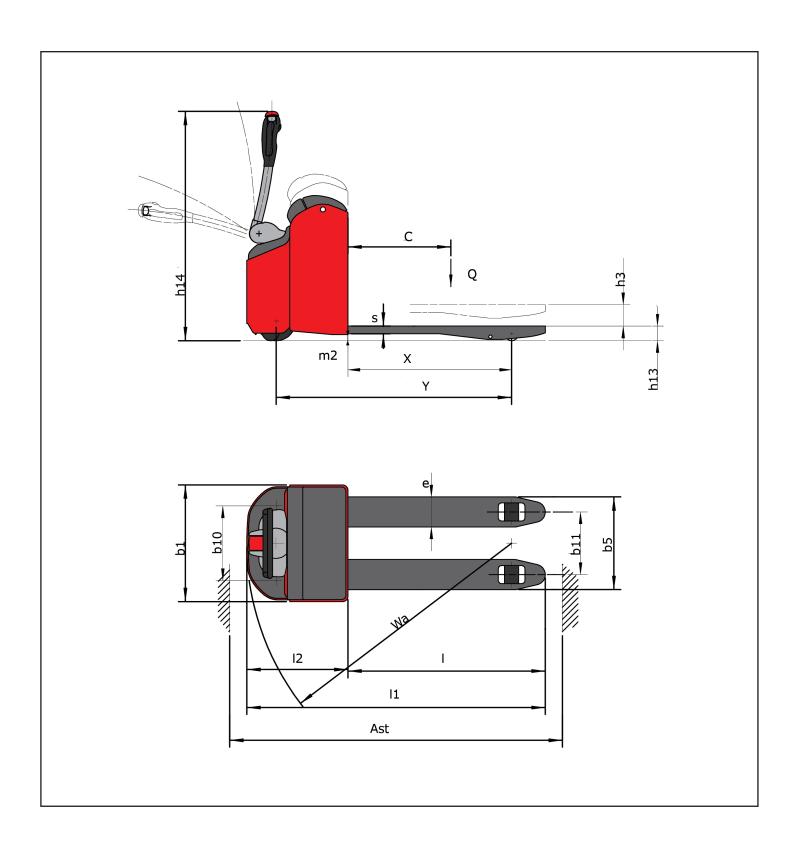

		MANITOU	MANITOU
		EP22 PFR6	EP22 PFR9***
Q	kg	2200	2200
С	mm	600	600
х	mm	894	894
у	mm	1496/1436	1496/1436
	kg	610	630
	kg	1239/1571	1247/1543
	kg	415/195	425/205
		,	
	mm	1x(Ø230x75)	1x(Ø230x75)
	mm	4x(Ø82x68)	4x(Ø82x68)
	mm	2x(Ø120x50)	2x(Ø120x50)
		1x + 2/4	1x + 2/4
b10	mm	435	435
b10	mm	365/505	365/505
h3	mm	125	125
h14	mm	1276	1276
h13	mm	85 +5 -0	85 +5 -0
l1	mm	1956/2463	1956/2518
12	mm	726/1233	726/1288
b1	mm	688	688
s / e / I	mm	45x175x1150	45x175x1150
b5	mm	540/680*	540/680*
m2	mm	40	40
Ast	mm	2250	2250
Wa	mm	1805	1805
vva	km/h	5,6/6	8,5/9
	m/s	0,029/0,038	0,029/0,038
	m/s	0,029/0,038	0,05/0,045
	%	10/20	12/20
	/0	10/20	12/20
	kW	1,7	1,7
	kW	2	2
	KW	-	-
	V/Ah	24/270	24/270 (375 max)
	kg	245 (360 max)**	24/270 (373 max)**
	ky	243 (300 max)	243 (300 max)***
	db (A)	65	65



