



I54 IMPACT CRUSHER

The I54v3 Impactor continues to bring high quality and high production capacity to McCloskey® mobile impactor applications.


The I54v3 has been designed with durability, power and ease of use in mind. The I54v3's versatility and upgraded design makes it ideal for some of the toughest applications worldwide, including asphalt recycling, concrete recycling, rock crushing, construction and demolition.

FEATURES

- ✓ 1200mm (48") diameter x 1350mm (53") wide Impactor
- ✓ 510Hp (380kW) engine
- ✓ Integrated hydraulic folding hopper
- ✓ I-beam plate fabricated chassis construction
- ✓ Open chassis design for ease of maintenance
- ✓ Fast setup time
- ✓ Tracked
- ✓ Integrated hydraulic folding stockpiling conveyors.
- ✓ Vibrating feeder under crusher discharge



New features include open chassis for ease-of-access, optional full length main conveyor or optional underpan under the crushing chamber conveyor, hydraulic adjustable magnet, and a new larger double deck prescreen for more efficient fines removal. Main and side conveyors are now wider to accommodate a larger volume of prescreen discharge material, and to allow for better discharge from the crushing chamber.

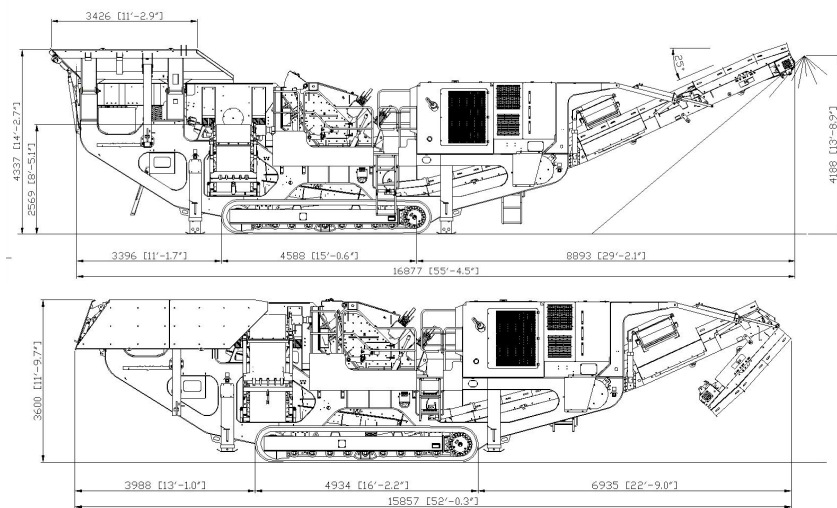

I54 TECH SPECS

Engine	380 kW (510Hp)
Impact Rotor (Diameter x Width)	1200mm (47.2") x 1335mm (52.6")
Double Deck Grizzly Pre-screen Width (inside wearplates) Length (overall)	1204mm (47.4") 2360mm (7' 8.8")
Hopper Volume	6.8m ³ (8.9 yd ³)
Stockpile Height Main Conveyor Side Conveyor	4.19m (13' 8.9") 2.57m (8' 5.1")

TRANSPORT

Transport Height	3.60m (11' 9.7")
Transport Length	15.85m (52' 0.3")
Transport Width	3.00m (9' 10")
Weight	52,900kg (116,624lb)

OPTIONS

Main conveyor variable speed control |
Hopper Extensions | Overband Magnet |
Water Pump and Dust Suppression System
| Various Blow Bar Material Options | Work
Lights | Belt Scale

*With magnet and dirt conveyor